

# PURE *sigma T*


Connect any spreader to PURE SigmaT side plough platform, lock PURE SigmaT to the fifth wheel coupling and you are ready for winter road maintenance. Take care of snow with PURE Delta<sup>4</sup> side plough and use spreader for antiskid treatment. Then unlock PURE SigmaT, leave it on support legs and you have your truck fast and easily ready for any other use.

## PURE SIGMA T WITH PURE DELTA4 SIDE PLOUGH

Max working width	3950 mm
Total width of blade	4450 mm
Blade height	1050 mm
Blade weight	700 kg
Ploughing angle	0-60°
Blade angle	60°
Required hydraulic flow	100 L/min / 210 bar
Transportation width of side plough	570 mm

Weight without spreader	approx. 2080 kg *
Weight without spreader and blade	approx. 1280 kg *

Working width with PURE Epsilon4.6 7,5 m

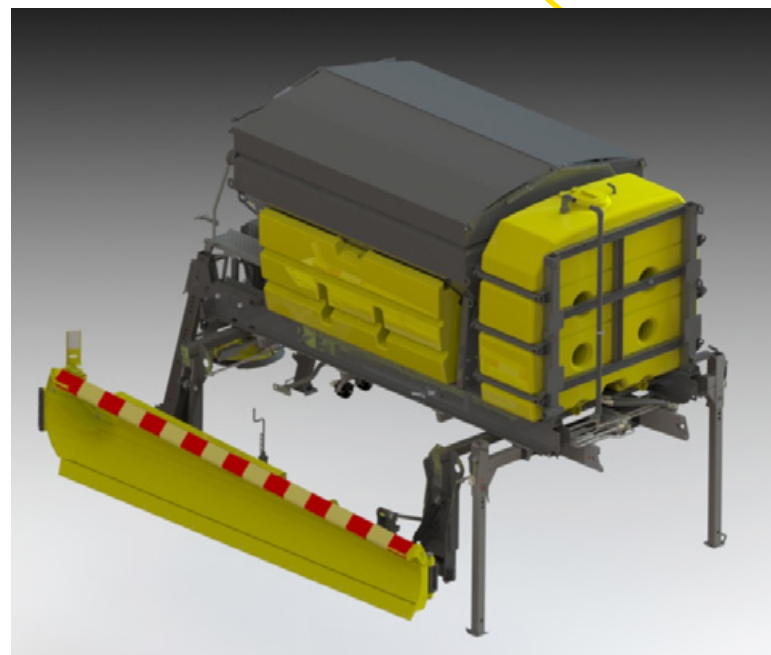

**PURE Road Maintenance**

Tel +358 10 2321 000  
www.pajakulma.fi



**PAJAKULMA**

JYKI GROUP