

**Break the boundaries in performance and safety**

**C Series**  
NEW AGE

**Extension Quick System and Smart Extension Sequence**  
Fast, precise, safe

**Heavy duty hook attachment**  
Ruggedness and durability in all applications

**Link on second boom**  
Boom negative angle allows access to confined spaces


**Link on column**  
Constant lifting capacity on all main boom positions

**Endless slewing**  
Efficient use in all the vehicle positions

**Ergonomic control station and user-friendly interface**  
Comfortable, convenient and safe

**Always stable**  
More than 40 stabilizer combinations available

	Lifting Moment	Slewing Angle	Working pressure	Oil tank capacity	Max Oil flow	Max lifting height	Standard crane weight
	tm	°	bar	l	l/min	m	kg
A2	24,8	endless	350	130	80	10,4	2745
A3	24,3	endless	350	130	80	12,4	2885
A4	23,8	endless	350	130	80	14,5	3025
A5	23,3	endless	350	130	80	16,7	3150
A6	22,9	endless	350	130	80	19,0	3255
A7	22,6	endless	350	130	80	21,2	3375
A8	22,3	endless	350	130	80	23,5	3465
A4J3	12,9	endless	350	130	80	22,7	3685
A5J3	12,0	endless	350	130	80	24,2	3640
A6J2	12,6	endless	350	130	80	24,5	3530

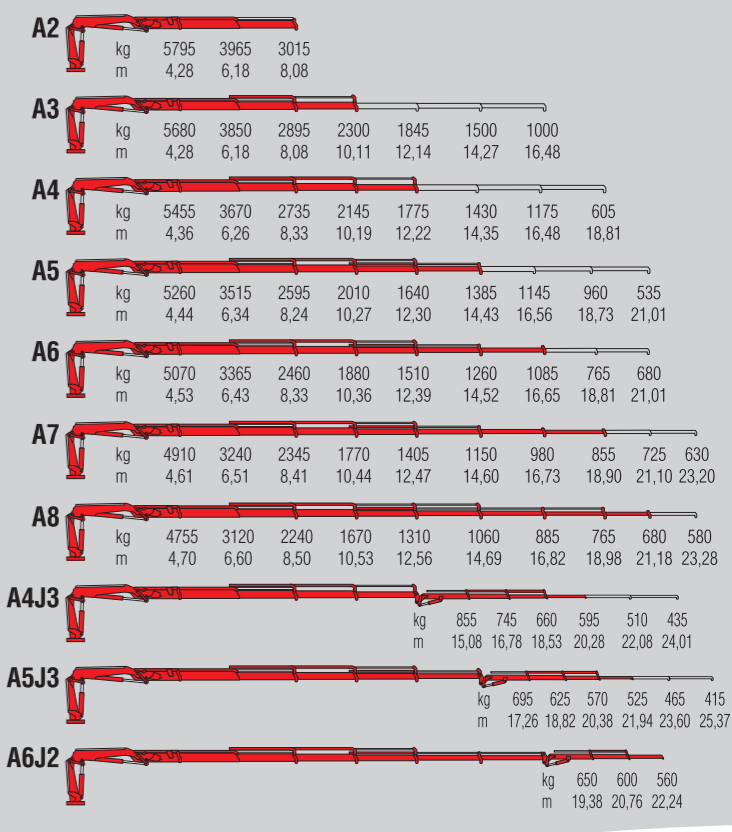

**9265C**  
**FERRARI**