






PURE *omega*

ROTABLE UNDER MOUNTED SCRAPER

Weight	780...820 kg *
Working width min	2500 mm
Working width max	3450 mm
Ploughing angle to the left	25° **
Ploughing angle to the right	25°
Blade angle	75...135°
Working force	12...24 kN
Required hydraulic flow	25 l min / 170 bar

* Without wear blades, depending on accessories

** Depending on chassis

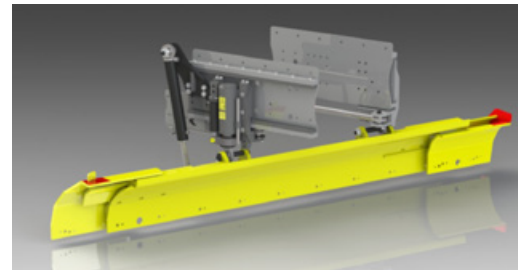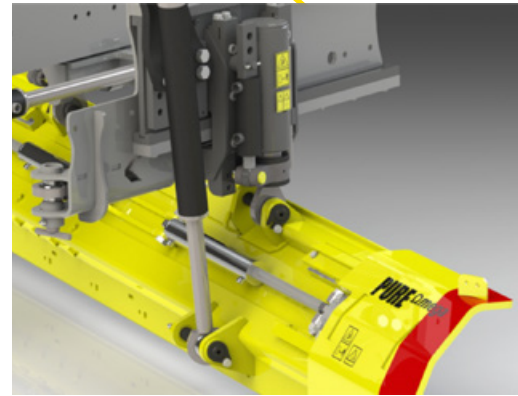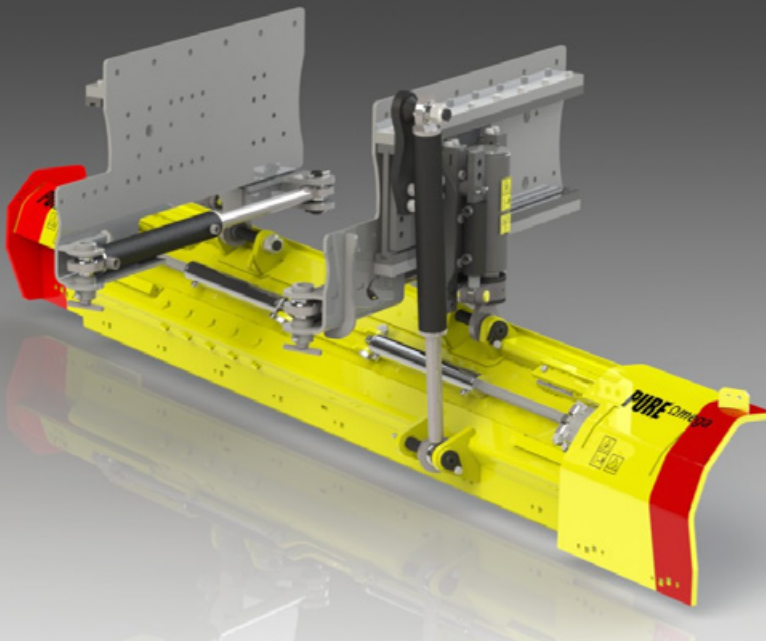

PURE Road Maintenance

Tel +358 10 2321 000

www.pajakulma.fi



PAJAKULMA

JYKI GROUP